MOEN®

DESCRIPTION

- Various finishes identified by suffix •
- Handheld shower •
- 69" double interlock spiral hose (metal) •
- Double check valve in handle •
- 30" slide bar with push button height selection

OPERATION

- Single function •
- Handshower holder rotates to adjust angle of handshower

FLOW

• EP suffix models are limited to 1.75 gpm (6.7 L/min) max

STANDARDS

- Designed and manufactured to meet: ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein
- EP suffix models are third party certified to WaterSense® •

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to . the original homeowner
- 10 year limited warranty when used in a multifamily installation •
- 5 year limited warranty when used in a commercial installation •
- Visit www.moen.com/support for complete details and limitations



Specifications


Single Function Handshower with Slide Bar

Models: S3880EP series

2-1/8

erse,

Certified by IAPMO R&T

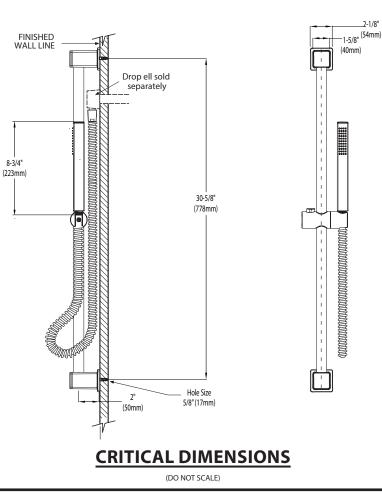

360472018 Seleased 00