Weymouth[®] Technical Specification

Decorative Tank Lever

YB8401

Stock Numbers:


- П YB8401BN – Decorative Tank Lever **Brushed Nickel Finish**
- YB8401CH Decorative Tank Lever П Chrome Finish
- YB8401ORB – Decorative Tank Lever Oil Rubbed Bronze Finish
- YB8401NL Decorative Tank Lever Polished Nickel Finish
- YB8401BG – Decorative Tank Lever Brushed Gold Finish
- YB8401BL Decorative Tank Lever П Matte Black Finish

Materials:

Tank Levers are constructed of zinc. Arm mechanism is brass.

MOEN®

Dimensions:

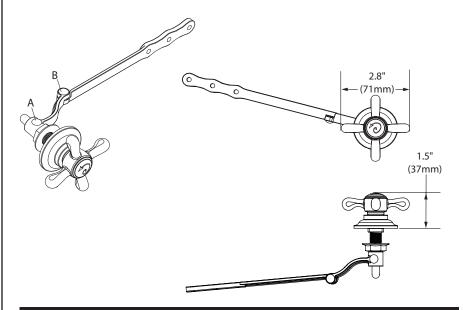

Installation Instructions:

- Remove existing tank lever. 1.
- 2. Remove the brass arm mechanism from the new tank lever by loosening screw A.
- Position the new tank lever through the tank hole. The tank lever handle 3. should be pointing away from the toilet bowl.
- Install the brass nut inside the tank and tighten. Depending on the curvature of 4 the tank, there might be a slight gap between the outside of the tank and the base of the lever.
- Loosen, but do not remove screw on the arm mechanism. 5.
- 6. Tighten screw A.
- 7. Adjust the brass arm mechanism so it does not come in contact with the tank wall or any part of the flush mechanism parts inside the tank.
- Tighten the adjustment screw (screw B) on the brass arm mechanism 8
- Attach the flapper valve chain to one of the three holes provided slots on the 9 brass arm.
- 10. Make sure that the arm does not activate, and no water is leaking through the flapper valve when the handle is in its normal position, (not flushing).

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number:

By Moen Incorporated

Tank Lever

25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.MOEN.COM

© 2019 Moen Incorporated.